

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:


Order:

Project:

Requirements:

By:

Date:

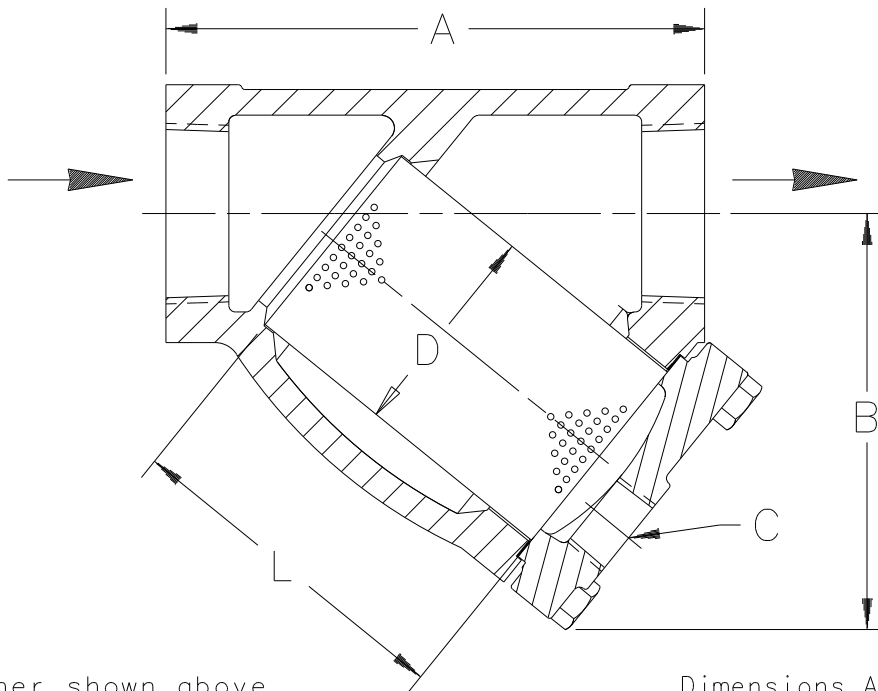


3" Strainer shown above

Dimensions A & B $\pm 1/8"$ [3mm]

DESCRIPTION	DIMENSIONS	
CONNECTION (NPT)	2-1/2" [DN 65]	3" [DN 80]
"A" (FACE TO FACE)	8-1/2" [216mm]	10-1/2" [267mm]
"B" (BOTTOM TO ϕ INLET)	6-1/2" [165mm]	8-1/8" [206mm]
"C" (BLOW DOWN THREAD)	3/4" NPT [DN 20]	1-1/4" NPT [DN 32]
"D" (DIA. OF SCREEN)	3-3/16" [81mm]	4-3/16" [106mm]
"L" (LENGTH OF SCREEN)	5-7/16" [138mm]	6-5/8" [168mm]
WEIGHT	26 lb [11.8 kgs]	26 lb [11.8 kgs]
MAXIMUM ALLOWABLE PRESSURE (VESSEL DESIGN)	250 psig at 406°F [17.2 bar at 208°C] 400 psig at 150°F [27.6 bar at 65°C]	

LIST OF MATERIALS	
NAME OF PART	MATERIAL
BODY	ASTM A48 CL. 30
SCREEN	T304 SS .045" PERF.
GASKET, RETAINER	NON-ASBESTOS
RETAINER, BOLTED	ASTM A48 CL. 30
SCREW, CAP	ASTM A193 GR. B7



Armstrong International, Inc.
Three Rivers Division
Three Rivers, MI 49093
Armstrong (269) 273-1415 Fax(269) 278-6555
Posted on Armstrong's homepage www.armstrong-intl.com

Product	CD No.	Date
A1SC STRAINER 2-1/2" & 3" CAST IRON	1043	5/30/06
		Rev. B