

DIMENSIONS & DATA CERTIFIED FOR:

Representative:

Order:

Customer:



Order:

Project:


Requirements:

By:

Date:

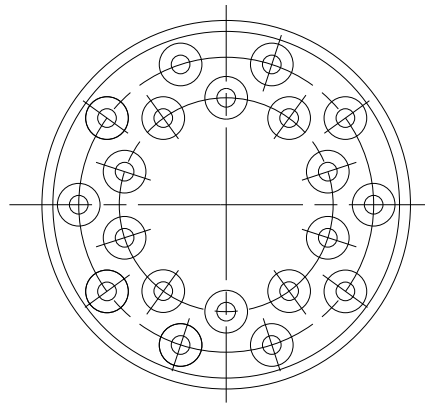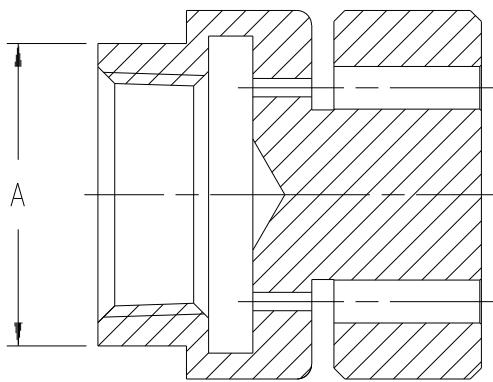

STEAM →

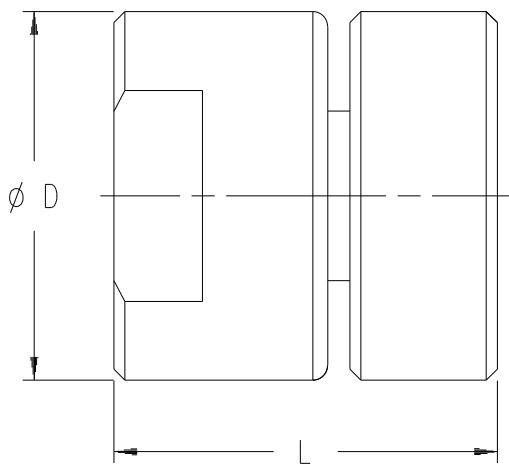

Dimensions & Weights				
SIZE	L	D	A	Weight
1/2" NPT [15A]	1-15/16" [48.5mm]	1-3/8" [35mm]	1-3/16" [30mm]	0.55 lbs. [0.25 kgs]
3/4" NPT [20A]	1-15/16" [49mm]	1-3/4" [45mm]	1-7/16" [36mm]	0.88 lbs. [0.40 kgs]
1" NPT [25A]	2-1/16" [52mm]	2" [50mm]	1-5/8" [41mm]	1.15 lbs. [0.52 kgs]
1-1/4" NPT [32A]	2-3/16" [55mm]	2-3/8" [60mm]	2" [50mm]	1.70 lbs. [0.77 kgs]
1-1/2" NPT [40A]	2-5/16" [59mm]	2-3/4" [70mm]	2-3/8" [60mm]	2.54 lbs. [1.15 kgs]
2" NPT [50A]	2-9/16" [65mm]	4-1/8" [105mm]	3-9/16" [90mm]	6.59 lbs. [2.99 kgs]

Specifications

FLUID	STEAM
PRESSURE RANGE	7-100 PSI [0.5-7 bar]
SILENCING LIMIT TEMP.	190°F [90°C]
MATERIAL	304 STAINLESS STEEL
CONNECTION	NPT



ARMSTRONG HOT WATER GROUP
221 Armstrong Blvd.,
Three Rivers, MI. 49093

Armstrong (269) 279-3600 Fax(269) 273-8656
Posted on Armstrong's homepage www.armstrong-intl.com

Product	CDY No.	Date
MS-6 NOISELESS HEATER	1099	4/8/03
		Rev. A