



Serie **COMMERCIAL STYLE**

Articolo **171L**




**RUBINETTERIE
BRESCIANE**



MEETS THE DESIGN CRITERIA OF
MSS_SP_110

Brass ball valve, FNPT threaded, full port sizes 1/4" to 4", with latch lock handle.

- Pressure rating 600 WOG-150 WSP.
- Temperature range -4°F to +366°F.
- Blow out proof stem, chrome plated brass ball.
- P.T.F.E seats, seals, and thrust washer.
- Adjustable stem packing.
- 100% electronically tested in the open and closed position at 80 psi.
- Not to be used for drinking water.
- Valve to be used in fully open or fully closed position.
- ANSI B1.20.1 connections.

171LCR: CHROME PLATED - size 1/4" to 4".

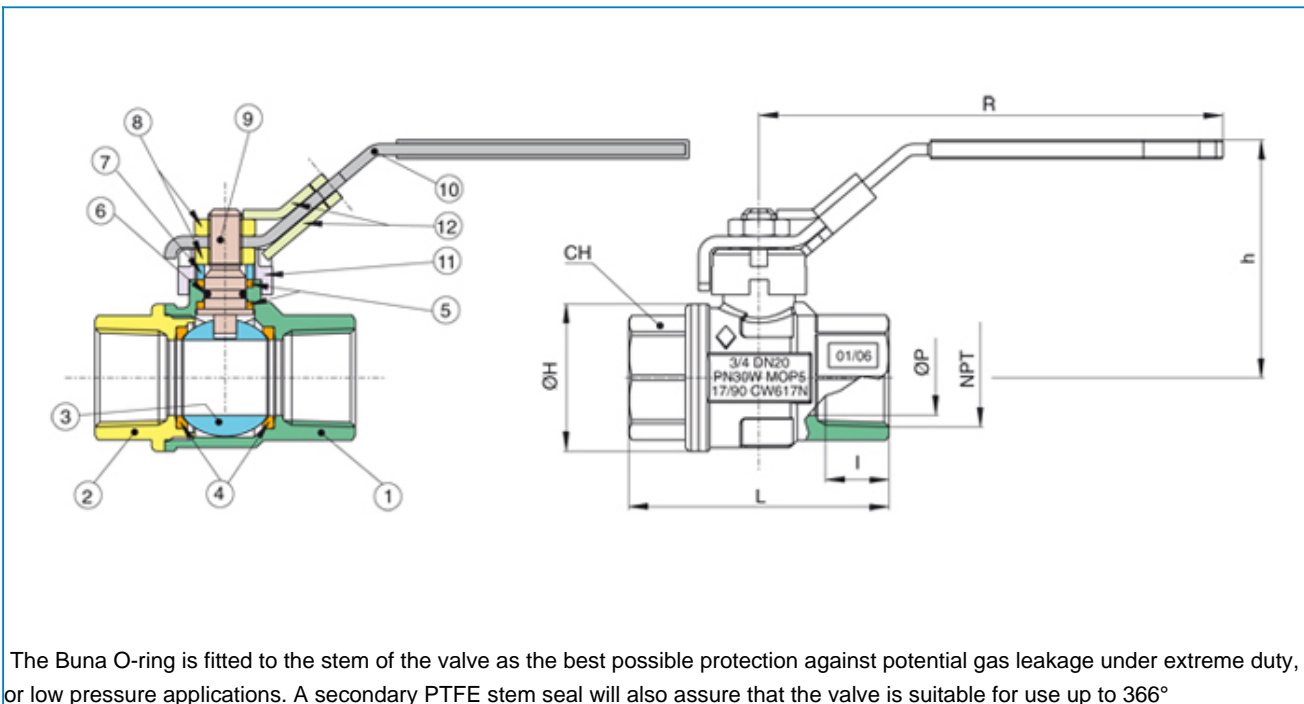

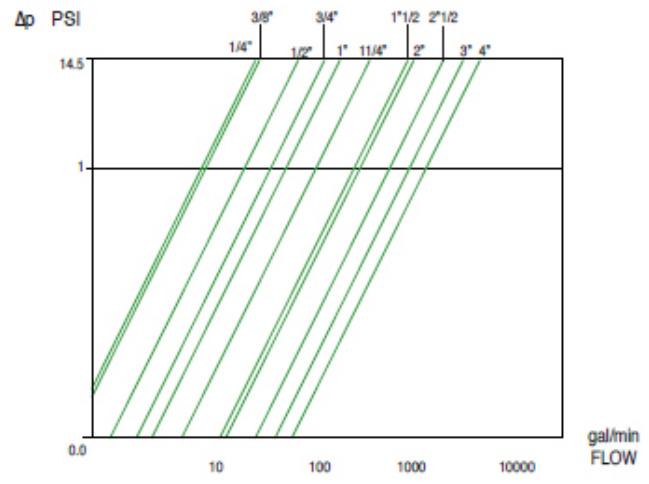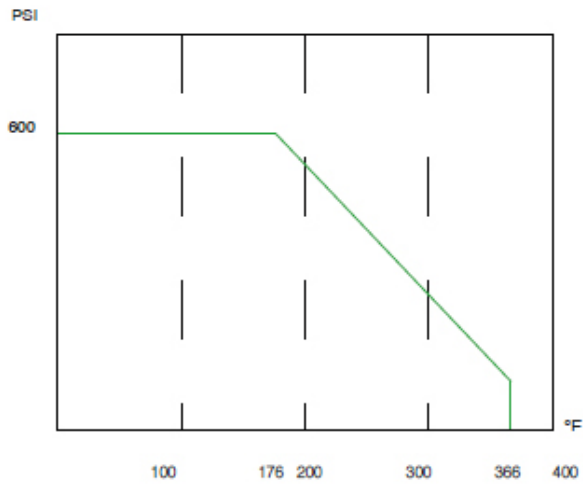

N Pos	PART NAME	MATERIAL	N PCS
1	BODY	BRASS C38000	1
2	END CONNECTION	BRASS C38000	1
3	BALL	BRASS C38000	1
4	BALL SEAT	P.T.F.E	2
5	THRUST WASHER/STEM SEAL	P.T.F.E	2
6	O-RING	NBR	1
7	PACKING GLAND	BRASS C38500	1
8	NUT	STEEL CL 04	2
9	STEM	BRASS C38500	1
10	HANDLE	Fe DD11 UNI EN 10111	1
11	BUSH	ZAMA G Zn Al4 UNI EN 1774	1
12	LOCKING DEVICE	Fe DD11 UNI EN 10111	1

SIZE	ØP	I	L	ØH	CH	R	h	CV	psi	Lbs
1/4"	0.39	0.39	2.03	0.91	0.79	3.78	1.83	6.24	600	0.40
3/8"	0.39	0.41	2.03	0.91	0.79	3.78	1.83	6.94	600	0.37
1/2"	0.59	0.54	2.44	1.30	0.98	3.78	1.99	18.84	600	0.55
3/4"	0.79	0.55	2.72	1.54	1.22	4.84	2.48	34.10	600	0.90
1"	0.98	0.66	3.07	1.93	1.50	4.84	2.64	49.71	600	1.30
1"1/4	1.26	0.68	3.43	2.32	1.89	5.94	3.15	102.89	600	2.25
1"1/2	1.57	0.68	3.90	2.87	2.13	5.94	3.39	265.90	600	3.26
2"	1.95	0.70	4.31	3.39	2.64	6.30	3.82	306.36	600	4.52
2"1/2	2.56	0.93	5.59	4.37	3.54	8.11	5.02	624.28	600	9.10
3"	3.15	1.02	6.46	5.35	4.13	8.11	5.45	1009.25	600	13.56
4"	3.94	1.09	7.60	6.54	5.12	10.28	6.56	1606.94	600	22.33

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov.